

5/1/2013

BALT5-500-ACTD

Fluorescent Emergency Ballast

500 Lumens

ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one lamp in the emergency mode for a minimum of 90 minutes.
- Provides a maximum initial lumen output of 500 lumens.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long-life, maintenance-free, rechargeable Sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- AC output ensures compatibility with newer lamp technologies and helps prolong lamp life.
- Time delay enhancement to overcome end-of-life circuit protection.

Catalog Number	Input Watts (W)		Input Amps (A)	
	120v	277v	120v	277v
BALT5-500-ACTD	2.7	2.7	0.130	0.130

MOUNTING

- Suitable for installation inside, on top or in remote* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL listed for factory or field installation.

HOUSING

- Low-profile galvanized steel construction.
- Compact design fits most fluorescent fixtures.

Project:	
Catalog#:	
Approved by:	




WARRANTY/LISTING


- Five year warranty against defects in material and workmanship. (Lamps excluded)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations.

LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one 8W-28W T5, one 17W-32W T8 or one 13W- 26W 4-pin compact fluorescent lamps.



Dimensions

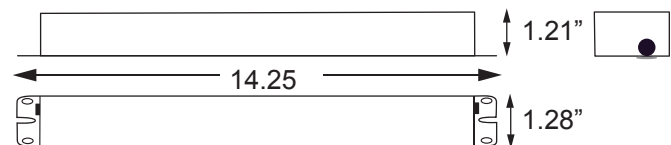

* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

Specifications subject to change without notice.



Emergency Ballast

Lamp Compatibility Data

Project:	
Catalog#:	
Approved by:	

Lamp	Initial Lumens
	1-lamp
T5 14W	375
T5 21W	425
T5 28W	500
T8 17W	350
T8 32W	475
4-pin PL CF 13W	325
4-pin PL CF 18W	425
4-pin PL CF 26W	475

Specifications subject to change without notice.