

3/13/2013

**High Wattage Emergency Lights**  
50 & 100 watts

**Features**

- Heavy duty construction
- Remote Capable
- UL listed for dry location (25°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

**Electrical**

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, 10Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

Model #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
HL0244	15.1	17.7	.0142	0.068
HL0245	20.5	21.1	0.189	0.089
HL0242	19.6	23.4	0.178	0.093
HL0243	29.3	33.5	0.273	0.131

Project:	
Catalog#:	
Approved by:	




**Illumination**

- Adjustable, glare-free PAR-Type lamp heads
- 6V model offers 7.2W lamps, standard
- 12V model offers 9W/12W lamps, standard

**Housing**

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic construction
- Side and top conduit knockouts

**Dimensions**

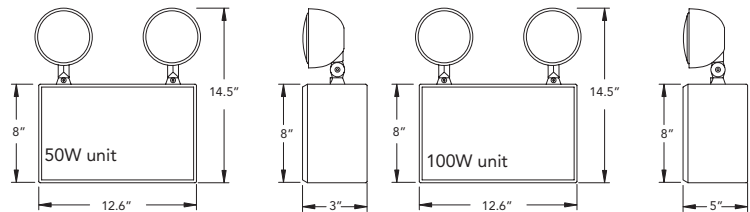

**ORDERING INFORMATION**

Catalog Number	Options	Rated Output Watts				Lamp Wattage	Voltage	Remote Capability Total Connected Heads/Fixture		
		1.5 hrs	2 hrs	4 hrs.	8 hrs.			4 hrs.	2 hrs.	1.5 hrs.
		HL0244	RC - Remote Capable	50	37			18	-	2x7.2W
HL0245	100	75		37	18	2x7.2W	6V	4*	9*	12*
HL0242	50	37		18	-	2x9W	12V	2**	3**	5**
HL0243	100	75		37	18	2x9W	12V	4**	7**	10**

example model# HL0245

Specifications subject to change without notice.

\* Based on 7.2 watt lamps, standard  
\*\* Based on 9 watt lamps, standard



Emergency Light