

3/15/2017

Extra Large Flood

HPS / 400 watts | MH / 1000 watts | PS / 750 watts

Project:	
Catalog#:	
Approved by:	

Applications

Ideal for lighting building facades, displays, signs, or for general security lighting purposes

Features

- Die-cast housing with hinged door frame for easy relamping (lamp included)
- Textured bronze finish
- Tempered glass lens
- UL listed for wet locations
- EPA = 4.7 sq. ft.; Max. fixture weight = 75 lbs
- IES Flood Distribution Type 6H x 7V

RAPID SHIP MODELS

AVAILABLE FOR NEXT DAY SHIPMENT

- ELFL-750-PS-4T-A
- ELFL-750-PS-4T-B



ORDERING INFORMATION

Catalog #	Watts	Volts †	Ballast	ANSI	Lamp Part #
ELFL-400-HPS-4T	400 HPS	4T	CWA	S51	LU400
ELFL-1000-MH-4T	1000 MH	4T	CWA	M47/E	MH1000/U
ELFL-750-PS-4T	750 PS	4T	PS-CWA	M149/E	MH750/BU/BT37/PS

ACCESSORIES (sold separately)

Catalog #	Description
ELFLWG	Wire guard with stainless steel construction
ELFLGS	Glare shield that can be reverse mounted to use as a back cutoff
ELFLVG	Vandal resistant, clear polycarbonate PC guard
ELFLB	Baffle with a black powder-coat finish
ELFSB	Stamped, two-piece swivel bracket in a bronze finish
ELFLSF	Bronze-finished die-cast slip fitter with mounting hardware and angle indicators

FACTORY INSTALLED OPTIONS

Catalog #	Watts	Accessory Code *
ELFSB	Stamped, two-piece swivel bracket in a bronze finish	A
ELFLSF	Bronze-finished die-cast slip fitter with mounting hardware and angle indicators	B

* When ordering, include the Accessory Code with the catalog number (e.g., ELFL-400-HPS-4T-A)

***Limited Quantities Available**


† 4T = 120, 208, 240, 277 volts (pre-wired to 277)

Specifications subject to change without notice.


Circle E logo indicates that this product complies with federal energy efficiency requirements.



DIMENSIONS

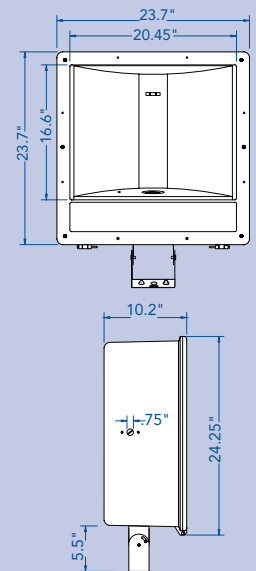


MOUNTING DETAIL - ELFSB



PHOTOMETRICS

1000W MH @ 20' Mounting Height
30' Below Horizontal
Isofootcandles

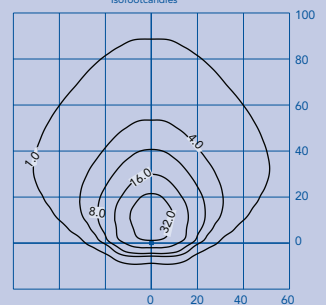

HID/CFL Fixtures