

1/11/2015

Medium LED Wallpack

MLWP Series

33, 46, 70 Watts

Project:	
Catalog#:	
Approved by:	

Features

- Energy Saving
- Comparable up to 250W HID using 70W LED
- 50,000 hour LED lifespan for maintenance-free operation
- Covers footprint of traditional wallpacks

Specifications

Housing

- Aluminum die-cast housing and lens frame
- Durable polyester powder coat finish
- Bronze housing

Lens

- Acrylic prismatic lens

LED

- 33, 46, 70W
- Color temp: 5000K
- CRI: >70
- Min. Starting Temperature: -30°
- 50,000 Hour Life at LM70
- Input voltage: 120-277V 50/60 Hz

Mounting

- 1/2" tapped top, side (2), and rear knockouts for 1/2" conduit or junction box.

Certifications


- UL/cUL Listed; suitable for wet locations

Warranty

- 5-Year Warranty

Applications




Ideal for parking facilities, entry ways, perimeter/pathway lighting or underpasses.

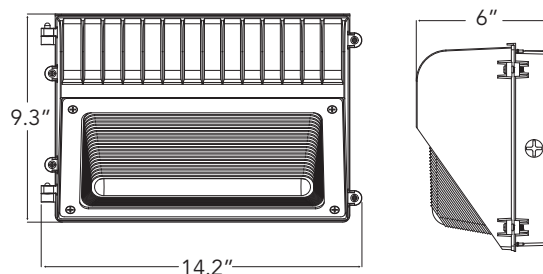

UPC Code	Model #	Input Wattage	Lumens	Efficacy (Lm/W)	Driver	Voltage	HID Replacement
08174	MLWP-5033-MV	33	2240	70	LED	120-277	100W HID
08175	MLWP-5046-MV	46	3450	75	LED	120-277	150W HID
08176	MLWP-5070-MV	70	5060	72	LED	120-277	200-250W HID

Sample Ordering Number:

Howard MLWP-5046-MV
Medium LED Wallpack
46W / 3450 Lumens / 75Lm/W
LED
120-277 volts

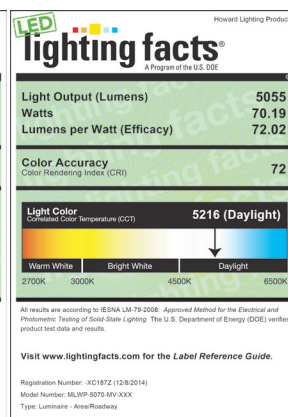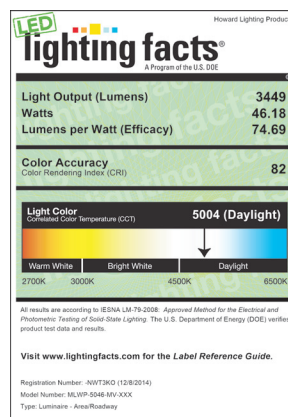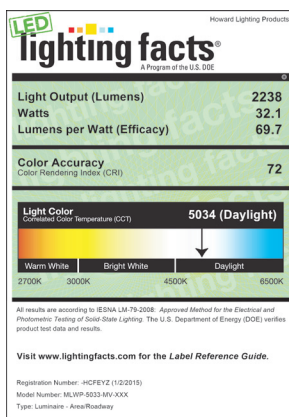

Specifications subject to change without notice.