


1/17/2012


Linear Fluorescent Lamps

T8 Linear Fluorescent Lamp 40 Watt / 75 CRI / 3500K

| Project: | |
|--------------|--|
| Catalog#: | |
| Approved by: | |

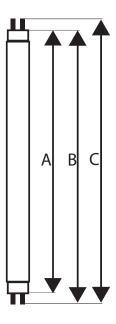

| Ordering Information | | |
|--|-----------------------------------|--|
| Howard Catalog Number (Ordering Code) | F40T8/735/ECO | |
| UPC Code | 02908 | |
| Description | T8 Low Mercury Linear Fluorescent | |
| Package Quantity | 25 | |
| Physical Characteristics | | |
| Base | Medium Bipin | |
| Bulb Type | T8 (8/8 inch) | |
| Bulb Description | Tubular Fluorescent Lamp | |
| Nominal Length (in) | 60 | |
| Base face to base face (Amax) (in) | 59.05 | |
| Base face to end of opposite base pin | 59.23/59.61 | |
| (Bmin/Bmax) (in) | | |
| End of base pin to end of the opposite pin | 59.50/59.61 | |
| end (Cmin/Cmax) (in) | | |
| Operating Characteristics | | |
| Nominal Wattage | 40 | |
| Approximate Initial Lumen (Im) | 3500 | |
| Approximate Mean Lumen (lm) | 3290 | |
| Average Rated Life (hours) | 24000 | |
| Color Temperature (K) | 3500 | |
| Color Rendering Index (CRI) | 75 | |

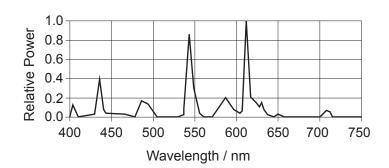

Note: Rated lamp life is 24,000 hours based on 3 hours per start and 30,000 hours based on 12 hours per start. Lamp life will be affected when using occupancy sensors, dimmers, or dimming systems. These products are Low-Mercury fluorescent lamps and pass the Federal TCLP for hazardous waste. Disposal regulations may very; check local and state regulations. Specifications subject to change.

Specifications subject to change without notice.