


1/17/2012

**T5 Linear Fluorescent Lamp**  
**24 Watt / 85 CRI / 4100K**  
**HIGH OUTPUT**

Project:	
Catalog#:	
Approved by:	

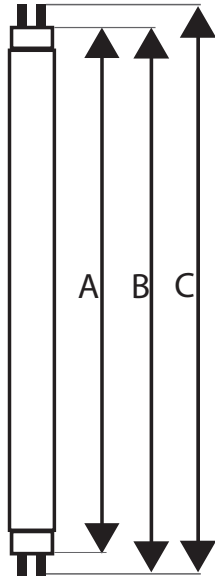

**Ordering Information**


Howard Catalog Number (Ordering Code)	F24T5/841/HO
UPC Code	01559
Description	T5 High Output Linear Fluorescent
Package Quantity	25

**Physical Characteristics**

Base	Mini Bipin (G5)
Bulb Type	T5 (5/8 inch)
Bulb Description	Tubular Fluorescent Lamp
Nominal Length	24
Base face to base face (Amax) (in)	21.61
Base face to end of opposite base pin (Bmin/Bmax) (in)	21.79/21.89
End of base pin to end of the opposite pin end (C) (in)	22.17

**Operating Characteristics**

Nominal Wattage	24
Approximate Initial Lumen (lm)	2000
Approximate Mean Lumen (lm)	1900
Average Rated Life (hours)	30000
Color Temperature (K)	4100
Color Rendering Index (CRI)	85

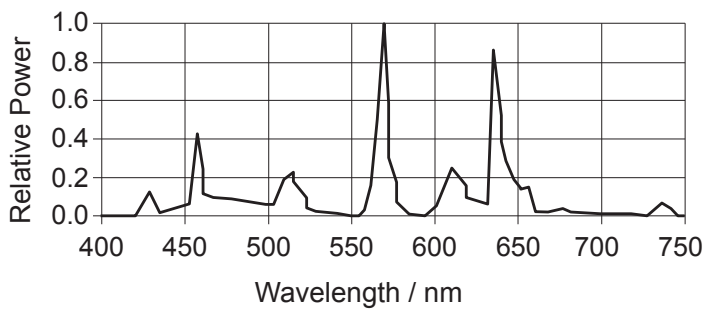

Note: Rated lamp life is 30,000 hours based on 3 hours per start. Lamp life will be affected when using occupancy sensors, dimmers, or dimming systems. These products are low-mercury fluorescent lamps and pass the Federal TCLP for hazardous waste. Disposal regulations may vary; check local and state regulations.

Specifications subject to change without notice.